SYSTEXX ACTIVE ACOUSTHERM - WALLCOVERING FOR A PLEASANT ROOM ATMOSPHERE

SAVES ENERGY, REDUCES NOISE





HUMAN COMFORT

PLEASANTLY WARM AND QUIET

Whether or not we feel comfortable in a particular room or situation depends on a number of different factors. Temperature and noise are particularly important. We usually find excessive heat, cold and noise unpleasant and disturbing. A balanced indoor climate and optimum noise levels have a positive impact on our performance and on our ability to concentrate. Of course, what we regard as a comfortable temperature varies from one person to another. In general, however, the less we move, the higher the temperature needs to be for us to feel comfortable. So, if we want to spend the evening on the sofa after work, being able to heat the living room quickly is a big advantage.

SYSTEXX AcousTherm reduces reverberation and helps rooms warm up faster – creating a pleasant atmosphere in homes, offices, restaurants, hotels and schools.






SOUND ABSORPTION: aw 0,25 (H)

A QUIET ATMOSPHERE

Coated or uncoated, SYSTEXX Active AcousTherm achieves its effect through trapped air, which keeps heat inside the room and reduces reverberation. This brings about a noticeable improvement in indoor noise levels: thanks to its sound-absorbing properties, Active AcousTherm meets the requirements for sound absorption class E. Powerful performance from a 3 mm fabric.

Music to our ears! An independent institute tested SYSTEXX Active AcousTherm in the reverberation room. It achieved sound absorption level α_w 0,25 (H) according to DIN EN ISO 354.

Reducing reverberation with SYSTEXX Active AcousTherm

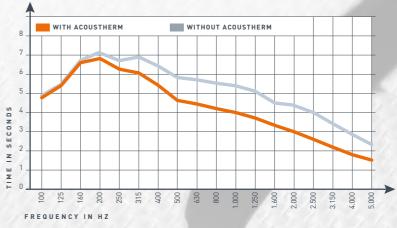

Assessment of sound absorption in accordance with DIN EN ISO 11 654 "Sound absorbers for use in buildings"




SYSTEXX
CERTIFIED QUALITY
Sound absorption a, 0,25 (H).

IMPRESSIVE!

INCREASING THE WALL SURFACE TEMPERATURE

A QUICK WARM-UP

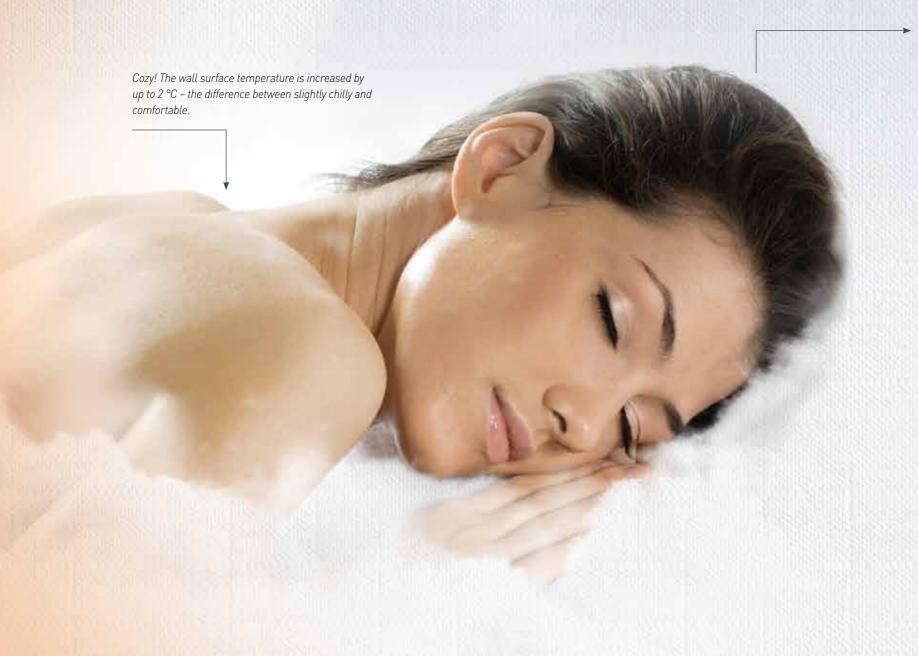

In restaurants, hotels, schools, offices and homes, rooms are often not in use all day long. If they warm up quickly, people feel comfortable faster and save energy. Walls that are only plastered or covered with ordinary wallpaper let the heat out and it takes a long time to warm the walls and the room. With SYSTEXX Active AcousTherm you can bring rooms to a comfortable temperature up to four times faster. The wall covering does not interfere with natural heat circulation or change the dew-point.

HARDWEARING AND BREATHABLE

STRONG AND BEAUTIFUL

Effective protection in challenging situations – SYSTEXX Active AcousTherm bridges cracks and provides long-term protection against new damage. At the same time, its sd value of just 0.03 m makes it extremely water vapor permeable, so you can breathe easily. And when it comes to color, the rainbow is the limit: the wall covering can be overpainted with standard emulsion paint without losing any of its acoustic or thermal properties.

SYSTEXX Active AcousTherm is particularly suitable for use in environments where noise needs to be kept to a minimum. The surface is very hardwearing and protects walls from damage caused by knocks and scrapes.

STRONG!



BRIDGES CRACKS Efficient preparation – SYSTEXX Active AcousTherm comes with integrated glass fabric. No need to paper over it. It can be hung like conventional glass fiber wall coverings.

VERSATILE!



HARDWEARING SURFACE



CREATIVE PAINT APPLICATIONS



FLAMMABILITY RATING B-s1, d0

UNRIVALED SAFETY

Stay cool in an emergency with SYSTEXX Active AcousTherm. Thanks to its excellent performance and treatment, SYSTEXX Active AcousTherm is certified as flame resistant. Its benefits are particularly evident in buildings and areas where fire protection is an important consideration.

The wall fabric that can stand the heat. It is flame resistant, generates almost no smoke in the event of a fire and does not drip.

IINIOHE



SYSTEXX
CERTIFIED QUALITY
Flammability rating B - s1, d0 nach DIN EN 13501-1

AT A GLANCE

TECHNICAL

HIGHLIGHTS



- Thermal conduction λ_{1101} at 10 °C (DIN EN 12667): 0,040 [W/(m*K)]
- Heat resistance R (DIN EN 12667): 0,06 [m²*K/W]
- No evidence of condensation
- sd value: 0,03 m

.. Acoustics .

- Sound absorption unpainted (DIN EN ISO 354): α,0,25 (H)
- Sound absorber class E

.. and more

- Flammability rating (DIN EN 13501-1 (2010)): B s1, d0
- Classe d'émission: A+
- CE conformity mark
- Roll width: approx. 0.96 m
- Fabric thickness: approx. 3.0 mm






Flammability rating B - s1, d0 nach DIN EN 13501-1





Hardwearing





Creative paint



www.systexx.com







NATURAL HIGH-QUALITY RAW MATERIALS

ENVIRONMENTAL QUALITY

Molten glass is transformed into super-fine glass fibers – the base material for glass

fabric. Natural, high-quality materials make SYSTEXX wall and ceiling coverings

environmentally friendly and non-toxic.

SYSTEXX Active AcousTherm carries an A+ emissions rating.







SYSTEXX Active AcousTherm 233

CERTIFIED EXCELLENCE! SYSTEXX CERTIFIED QUALITY



A+ for zero emissions

OUR SERVICE

- I We will be happy to assist you personally
- I Please contact us if you would like to receive further information on SYSTEXX
- For free original samples and texts for bids, please go to www.systexx.com



systexx@vitrulan.com **I** www.systexx.com SYSTEXX by Vitrulan is a brand of Vitrulan Textile Glass

Vitrulan Textile Glass GmbH I Bernecker Str. 8 **I** 95509 Marktschorgast **I** Germany T+49 (0) 9227 77 0 **I** F +49 (0) 9227 77 700 **I** www.vitrulan.com A company of the Vitrulan Group

